


Cam & Groove Couplings

Type A


Male Adapter with Female Thread

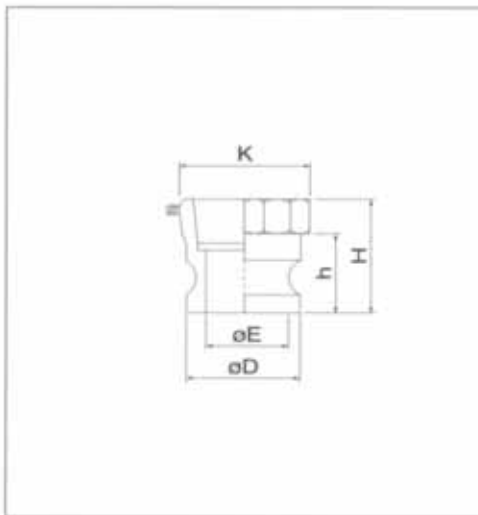

DN	D	E	K	h	H
1/2"	24	13	27	25	38
3/4"	32	21	33	28	38
1"	37	24	39	33	46
1 1/4"	45	31	48	40	53
1 1/2"	53	39	56	40	53
2"	63	48	68	46	61
2 1/2"	76	60	83	49	77
3"	92	74	96	51	72
4"	120	102	124	51	75
5"	146	126	160	54	78
6"	176	152	185	56	84

Type B

Female Coupler with Male Thread

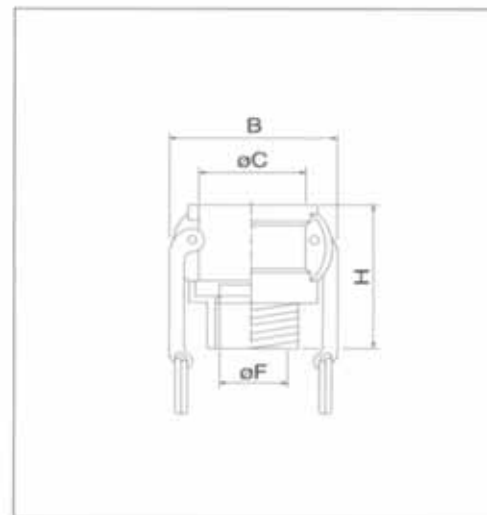


DN	B	C	F	H
1/2"	44	25	14	47
3/4"	50	32	19	51
1"	60	37	26	60
1 1/4"	80	46	32	70
1 1/2"	89	54	38	72
2"	97	64	50	77
2 1/2"	110	76	65	85
3"	135	92	77	89
4"	165	120	101	93
5"	190	146	126	96
6"	254	176	146	110

- Materials : 316 Stainless Steel .
- Sizes : 1/2" - 6".
- PP : 1/2" - 3" (BSP only).

Cam & Groove Couplings

Type C


Female Coupler with Hose Shank

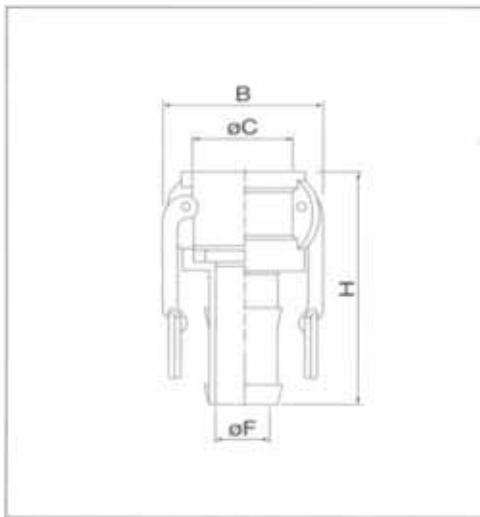

DN	B	C	F	H
1/2"	44	25	8	67
3/4"	50	32	15	85
1"	60	37	20	97
1 1/4"	80	46	27	103
1 1/2"	89	54	33	108
2"	97	64	44	122
2 1/2"	110	76	56	138
3"	135	92	65	158
4"	165	120	90	165
5"	190	146	116	182
6"	254	176	144	204

Type D

Female Coupler with Female Thread

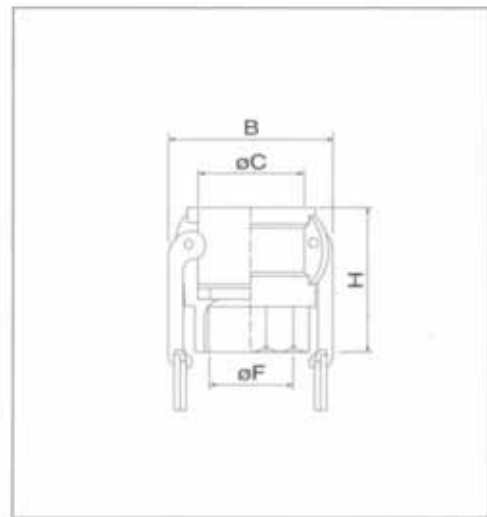


DN	B	C	F	H
1/2"	44	25	14	48
3/4"	50	32	22	50
1"	60	37	25	58
1 1/4"	80	46	32	64
1 1/2"	89	54	38	68
2"	97	64	48	72
2 1/2"	110	76	61	77
3"	135	92	76	89
4"	165	120	101	94
5"	190	146	123	96
6"	254	176	146	108

- Materials : 316 Stainless Steel .
- Sizes : 1/2" - 6".
- PP : 1/2" - 3" (BSP only).

Cam & Groove Couplings

Type E

Male Adapter with Hose Shank

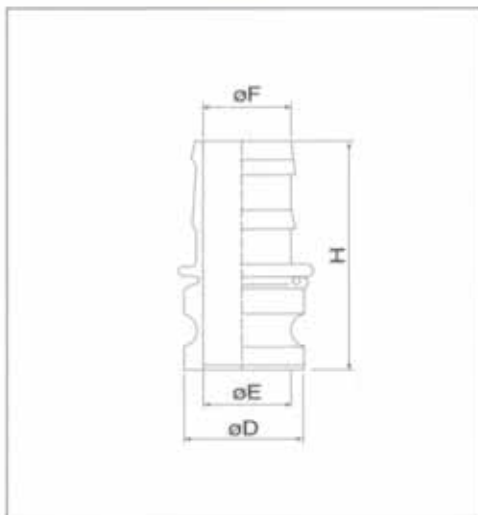

Type F

Male Adapter with Male Thread



DN	D	E	F	H
1/2"	24	13	8	72
3/4"	32	19	15	89
1"	37	24	20	106
1 1/4"	45	31	27	110
1 1/2"	53	38	33	112
2"	63	46	45	130
2 1/2"	76	60	56	141
3"	92	73	65	165
4"	120	102	90	178
5"	146	126	116	187
6"	176	155	144	210


DN	D	E	K	h	H
1/2"	24	13	27	25	53
3/4"	32	19	33	28	55
1"	37	24	41	34	66
1 1/4"	45	31	45	40	78
1 1/2"	53	38	53	41	78
2"	63	47	63	47	85
2 1/2"	76	58	83	49	100
3"	92	73	93	51	100
4"	120	102	121	51	108
5"	146	126	168	54	111
6"	176	152	185	56	126

- Materials : 316 Stainless Steel
- Sizes : 1/2" - 6".
- PP : 1/2" - 3" (BSP only).

Cam & Groove Couplings

Type DP


Dust Plug (For Use with Couplers)

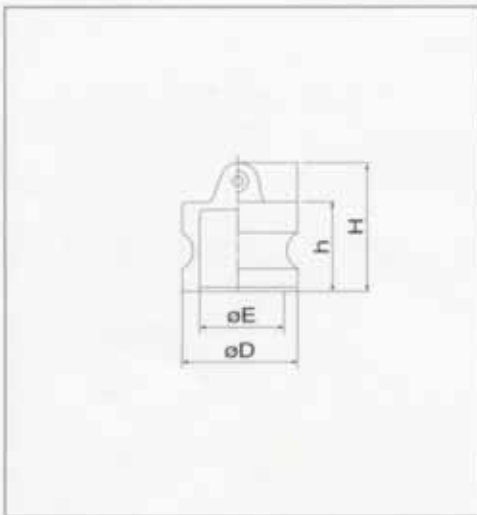

DN	D	E	h	H
1/2"	24	13	27	38
3/4"	32	21	26	38
1"	37	25	31	44
1 1/4"	45	30	38	51
1 1/2"	53	38	38	51
2"	63	48	45	60
2 1/2"	76	60	46	63
3"	92	74	48	68
4"	120	102	48	67
5"	146	126	51	79
6"	176	155	60	85

Type DC

Dust Cap (For Use with Adapters)

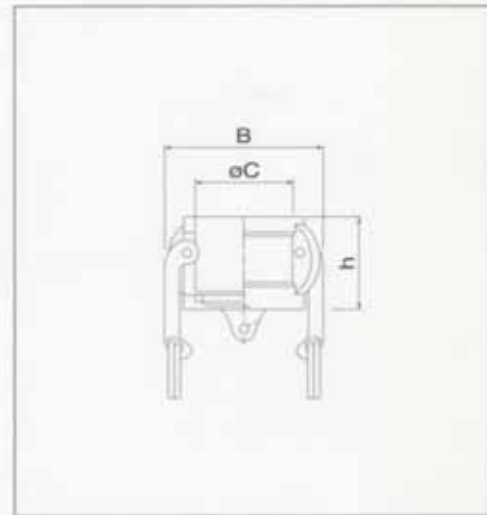


DN	B	C	H
1/2"	44	25	32
3/4"	50	32	35
1"	60	37	40
1 1/4"	80	46	46
1 1/2"	89	54	48
2"	97	64	50
2 1/2"	110	76	55
3"	135	92	57
4"	165	120	57
5"	190	146	59
6"	254	176	63

- Materials : 316 Stainless Steel .
- Sizes : 1/2" - 6".
- PP : 1/2" - 3" (BSP only).

Cam & Groove Couplings

Type DW

Female Coupler with Butt Weld End

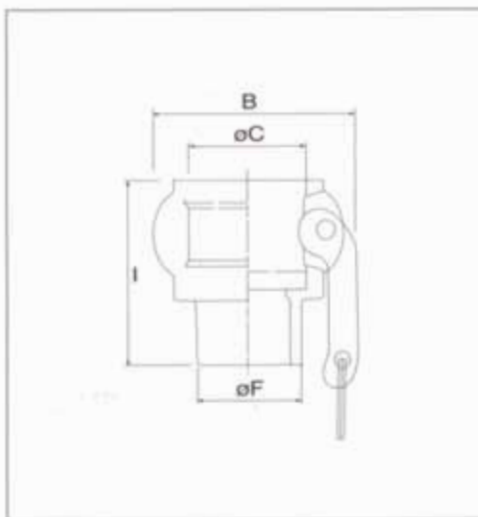

DN	B	C	F	H
1/2"	44	25	22	48
3/4"	50	32	27	50
1"	60	37	34	58
1 1/4"	80	46	43	64
1 1/2"	89	54	49	68
2"	97	64	61	72
2 1/2"	110	76	74	77
3"	135	92	90	89
4"	165	120	116	94
5"	190	146	143	96
6"	254	176	170	108

Type AW

Male Adapter with Butt Weld End



DN	D	E	H	K
1/2"	24	14	33	21
3/4"	32	21	35	27
1"	37	24	44	34
1 1/4"	45	28	50	42
1 1/2"	53	37	51	48
2"	63	47	62	60
2 1/2"	76	58	65	76
3"	92	74	65	89
4"	120	101	70	114
5"	146	126	88	143
6"	176	152	91	170

Material : 316 Stainless Steel.

Sizes : 1/2" - 6".